
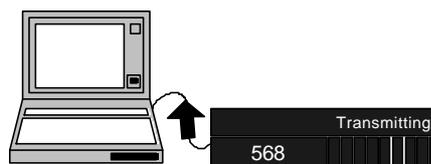
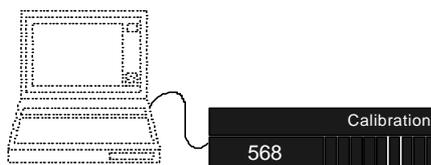
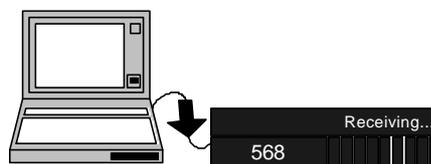
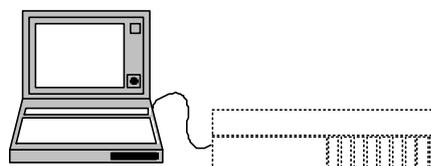


Quick Guide to Setting up 568 from a PC.

V1.0 JMB 22/10/99

In this Quick Guide sheet, menus on the Meridian program are in shown in **Bold**.

1. Install the software with the setup discs.
2. Run the program from the **Start** menu.
3. Select a Serial Port: **View/Options**. This will usually be COM1.
4. Connect the RS232 Cable.
5. Create a **New** file: **File/New/568**.
6. Double Click on **Surround Processor 1**.
7. Click on Owner and Fill in the customer's name.
8. **Save As** your customer's name: Press the **Save** button on the toolbar. This is now the customer's file that you can keep for reference.
9. Single Click on **Settings**. Give this settings Type your customer's name also.
10. Click on the icons to customise the settings to match the customer's system:
 - a) **Speakers**:
 - Layout**
 - Sizes** (run Calculator if necessary)
 - b) **Sources**
 - c) and **Setup**
11. Switch on the product. Store the settings to the product - **File/Store to Products /Everything**.
12. Leave the 568 connected to the PC.
13. Calibrate the speakers with the 568's *Calibration* (See *User Guide*).
14. Listen to the system and store any Presets required for the customer.
15. If required, Enter *Sine/Sub* Setting mode to set the Sub Crossovers (See *User Guide*).
16. Load the calibrated settings back to the computer with the **Fetch** button on the toolbar.
17. **Save** the calibrated settings: **File/Save**

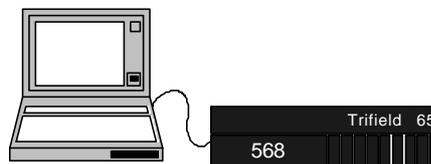

Your calibrated settings are now permanently stored in the product, and the customer can always get back to them using **Type**. You also have the settings stored on the computer for future reference.